

EXODUS[™] AQUAXL

WEATHERPROOF IP67 IK10 - WALL MOUNT
MAINTAINED LED JUMBO 40m EXIT LIGHT

This robust and sturdy weatherproof IP67 ingress-protected LED Exit Light is designed specifically to withstand harsh weather conditions while producing excellent clarity throughout all external egress paths for years of reliable Exit Lighting.

Available in a traditional water-tight polycarbonate enclosure, the AQUAXL provides excellent protection against water, dust and impact and is suited for a range of external applications such as car parks and stadiums, as well as indoor areas such as swimming centres, parks, construction sites and train stations.



Available as:



SYNTHIUM[™] nanotechnology is an advanced environmentally sustainable energy development that offers extended battery life, low cost of ownership, enhanced performance and improved safety.




Technical Specifications

Item	Part Number	EXS-AQUAXL/A - No Arrow EXS-AQUAXL/R - Arrow Right EXS-AQUAXL/L - Arrow Left
	Description	LED Weatherproof IP67 IK10 Wall Mount 40m Jumbo Exit Light c/w <i>Synthium™</i> Battery
Input	Voltage & Frequency	230VAC ; 50Hz
	Installation	Large terminal block and 20mm ² cable entry
Output	Light Source	High performance LED bar, 100,000 hours
	Mode of Operation	Maintained
	Power Consumption	5W (standby)
	Emergency Duration	> 120 minutes
Controls	Charger	Intelligent 3-stage charger with <i>Synthium™</i> battery management system
	Protection	Overcharge, low voltage disconnect, overcurrent, short circuit
	Testing Facility	Manual test switch
	Indicators	Battery charger green LED
Physical	Battery	<i>Synthium™</i> Lithium Iron Phosphate - 10 year design life
	Diffuser	Screen printed acrylic - pictographs as per part numbers above
	Construction	Flame-retardant polycarbonate
	Mounting	Surface mounted - wall only
	Dimensions L x W x H	600mm x 270mm x 140mm
	IP, IK Rating	IP67, IK10
	Weight	4.0kg
	Warranty	5 years including battery
Environment	Operating Temperature	1° to 40°C
	Relative Humidity	0 to 95%
Compliance	Standards	RCM / EMC, AS/NZS 2293, AS/NZS 60598.1
	AS/NZS 2293 Classification	C0 E1.6 C90 E1.0
Accessories	STAR™ Self-Test and Reporting	P/N: EXS-AQUAXL/ST
	DALI-compatible	P/N: EXS-AQUAXL/DL
	SYNECTIX™ RF Wireless	P/N: EXS-AQUAXL/RF
	Replacement Battery	P/N: BAT-AQUAXL: <i>Synthium™</i> LiFePO ₄

NOTE: Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

Dimensions

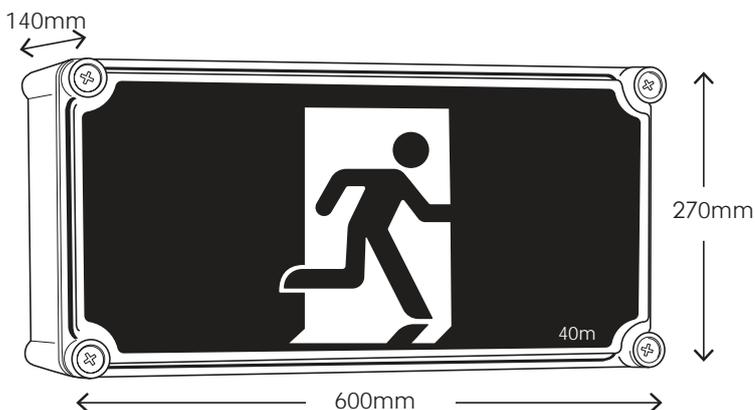

Distributed By:

